




## 8" 不锈钢膜壳-卫生型

8" Membrane Housing- For Sanitary Use



### 参数概述/General Specifications

侧进水, 侧口数量2~8只	Side port, with qty. of 2~8 pcs
不锈钢卡簧锁紧	SS retaining ring closure
最大工作压力: 300PSI/600PSI	Max working pressure: 300PSI/600PSI
最大工作温度: 90°C	Max working temperature: 90 °C
壳体材质: 不锈钢304/316L	Housing Material: SS304/316L
端盖材质: 不锈钢 304/316L	End cap material: SS 304/316L
O型圈材质: EPDM, NSF级别	O-ring material: EPDM, with NSF certificate
表面处理: 机械抛光 (320目, Ra<0.6)	Finish: Mechanical polishing (320 mesh, Ra<0.6)
连接形式	Connect type
--进/出水口: 卫生级接口	--F/C port: Tri-Clamp ferrule
--透过水口: 卫生级接口	-- Permeate port: Tri-Clamp ferrule
型号: 配8040标准膜, 可装1~6支	Model: for 8040 membrane element, 1~6 pcs

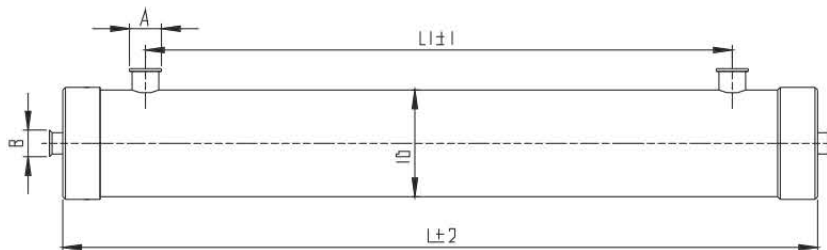

### 尺寸/Dimension

型号/Model	L(mm)	L1(mm)	ID(mm)	A(inch)	B(inch)
JD-8040-1	1359	1119	Φ203	1.5~3"	1.5"
JD-8040-2	2375	2135	Φ203	1.5~3"	1.5"
JD-8040-3	3391	3151	Φ203	1.5~3"	1.5"
JD-8040-4	4407	4167	Φ203	1.5~3"	1.5"
JD-8040-5	5423	5183	Φ203	1.5~3"	1.5"
JD-8040-6	6439	6199	Φ203	1.5~3"	1.5"